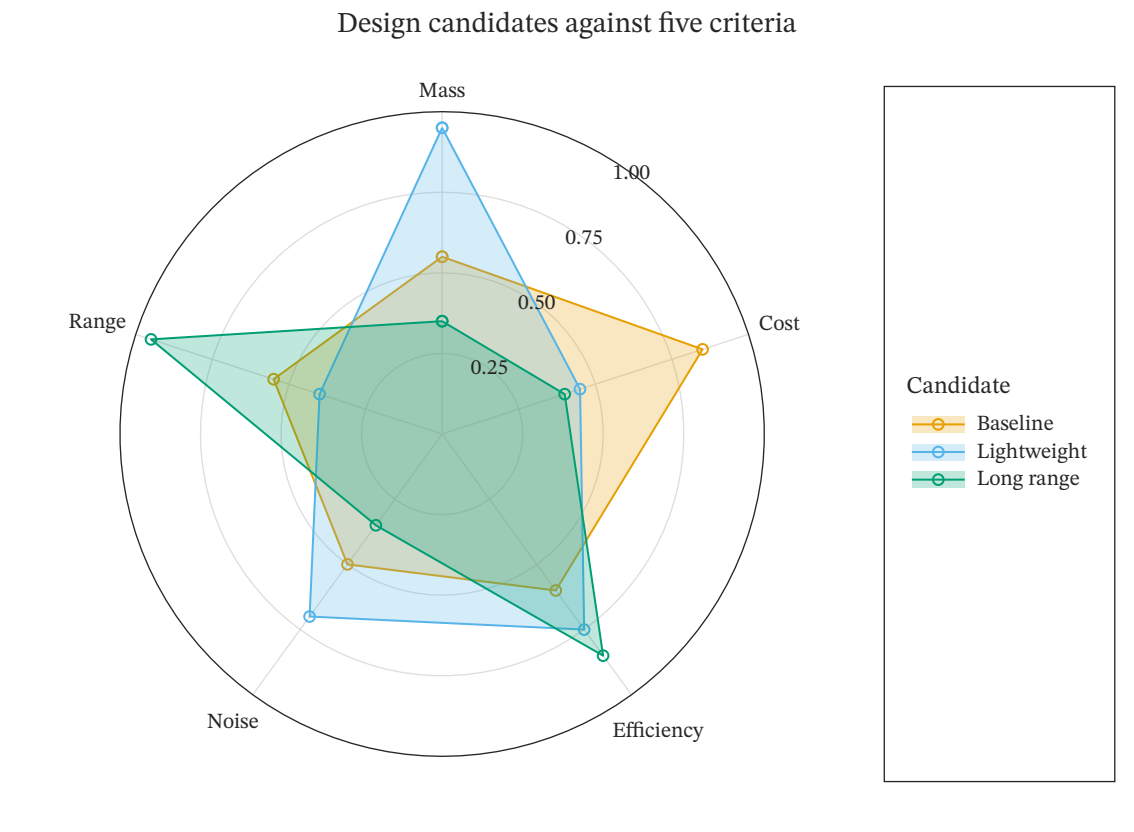

Design candidates against five criteria
Mass
Cost
Efficiency
Noise
Range
0.25
0.50
0.75
1.00
Candidate
Baseline
Lightweight
Long range